


NEW

1170fps POWER!
with *Lead Pellets*

Factor

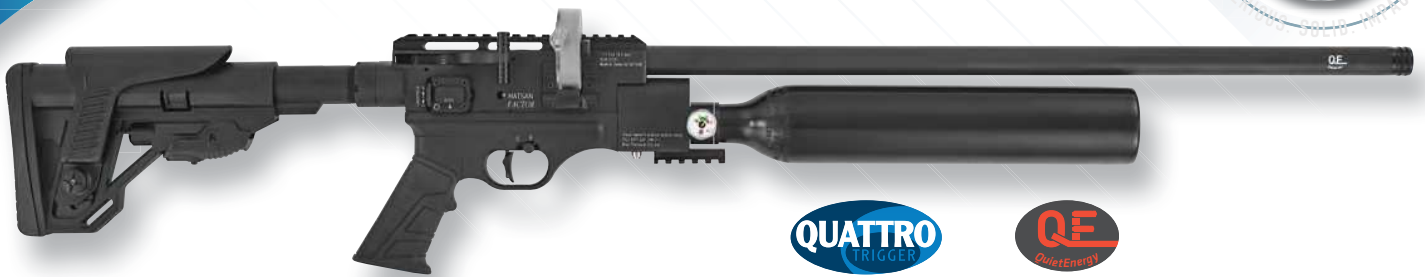

Model		Hatsan Factor		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)		355m/s (1170fps)	325m/s (1070fps)	295m/s (970fps)
Energy (*)	Joules	36	51	57
	ft.lbs	27	38	42
Magazine Capacity		24	21	19
Air Tube Volume		500cc (aluminum)		
Fill Pressure		250 BAR		
Number of Shots Per Fill		320	310	300
Number of Shots at Optimal Velocity		105	100	90
Stock		Telescopic stock. Elevation adjustable cheek rest. Pistol grip.		
Overall Length		1025mm (40.3") Stock Shortened 1090mm (42.9") Stock Extended		
Barrel Length		585mm (23")		
Weight		3.6kg (7.9lbs)		

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.


- Manual loading, side lever action, pre-charged pneumatic (PCP) air rifle.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- 3 power adjustable Transfer Port.
- Externally adjustable hammer preload.
- QuietEnergy fully shrouded barrel and Integrated Sound Moderator – Approximately 50% Quieter.
- 1/2" UNF threaded muzzle for additional detachable sound moderators.
- Precision rifled and choked steel barrel for accuracy.
- Detachable 24-shot magazine in .177 (4.5mm), 21-shot magazine in .22 (5.5mm) and 19-shot magazine in .25 (6.35mm). Includes 2 magazines.
- 500cc volume detachable aluminum air bottle. Spare aluminum air bottles are available.
- 580cc carbon fiber air bottle upgrade available.
- Foster quick disconnect male fitting on the rifle and female quick disconnect nozzle included in the box.
- Built-in pressure gauge to monitor the cylinder pressure.
- Tactical telescopic stock and soft rubber pistol grip.
- Elevation adjustable cheek rest and rubber butt pad.
- Aluminum frame with integrated picatinny rail 11 mm and 22 mm scope mounts.
- Additional picatinny rail beneath the forearm.
- Reversible cocking handle for ambidextrous operation.
- Aluminum trigger guard and black metal trigger.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Vertical and horizontal trigger shoe adjustment.
- Patented anti-knock system to prevent discharge of the rifle when rifle is knocked or bounced.
- Manual Safety.
- Hard case is included & Foregrip with bipod is included.

Power Setting	Hatsan Factor Recommended Energy* 4.5mm / .177cal
3	20 to 36 Joule
2	11 to 30.5 Joule
1	9.4 to 18.8 Joule

Power Setting	Hatsan Factor Recommended Energy* 5.5mm / .22cal
3	35.8 to 51 Joule
2	28 to 39 Joule
1	19 to 22.9 Joule

Power Setting	Hatsan Factor Recommended Energy* 6.35mm / .22cal
3	38 to 57 Joule
2	30.5 to 41.5 Joule
1	18 to 21.5 Joule

* Energy Range "Min to Max" Hammer Preload
** Energy Range with "Min to Max" Hammer Preload and Regulator at 140 BAR.

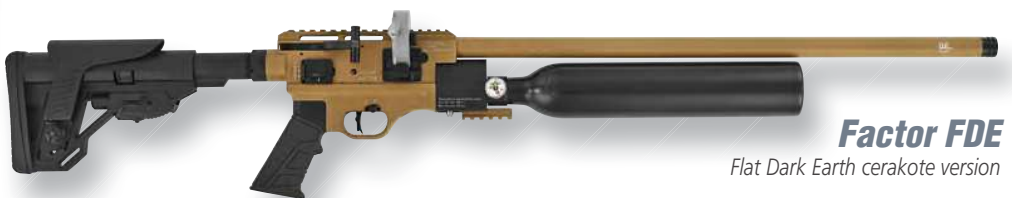

Factor FDE
Flat Dark Earth cerakote version



- 500cc volume detachable aluminum air bottle.
- Spare aluminum air bottles are available.
- 580cc carbon fiber air bottle upgrade available.



(* Scope sold separately)